



## PDF technical sheet NU2204ET2XC3




### Single row cylindrical roller bearings

Single row cylindrical roller bearing, floating, separable, polyamide cage

| Product definition     |          |
|------------------------|----------|
| d                      | 0.7874 " |
| D                      | 1.8504 " |
| B                      | 0.7087 " |
| E                      | 1.6339 " |
| F                      | 1.0433 " |
| rs min                 | 0.0394 " |
| r1s min                | 0.0236 " |
| Radial clearance class | C3       |
| Mass (without HJ ring) | 0.48 oz  |
| Brand                  | NTN      |

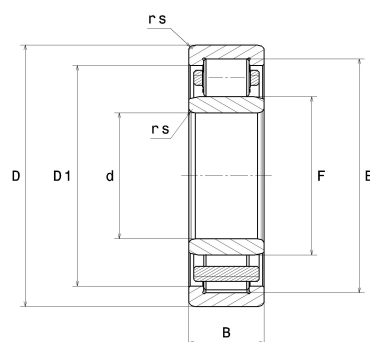

| Product performance                           |            |
|-----------------------------------------------|------------|
| Dynamic load, C                               | 30.50 kN   |
| Static load, C0                               | 28.30 kN   |
| Fatigue limit load, Cu                        | 3.45 kN    |
| Nlim (oil)                                    | 16,000 RPM |
| Nlim (grease)                                 | 14,000 RPM |
| Min operating temperature, Tmin               | -40 °C     |
| Max operating temperature, Tmax               | 248 °C     |
| Characteristic cage frequency, FTF            | 0.39 Hz    |
| Characteristic rolling element frequency, BSF | 4.31 Hz    |
| Characteristic outer ring frequency, BPF0     | 4.29 Hz    |
| Characteristic inner ring frequency, BPFI     | 6.71 Hz    |

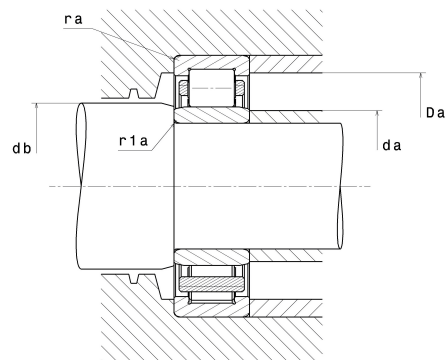

| Abutment dimensions |          |
|---------------------|----------|
| da min              | 0.9449 " |
| da max              | 1.0236 " |
| db min              | 1.1417 " |
| Da max              | 1.6535 " |
| ra max              | 0.0394 " |
| r1a max             | 0.0236 " |

### Calculation factors

Equivalent dynamic radial load

$$P = Fr$$

Equivalent static radial load

$$P_0 = Fr$$