

PDF technical sheet NU330EG1C4




Single row cylindrical roller bearings

Single row cylindrical roller bearing, floating, separable, brass cage

Product definition	
d	5.9055 "
D	12.5984 "
B	2.5591 "
E	11.1417 "
F	7.5984 "
rs min	0.1575 "
r1s min	0.1575 "
Radial clearance class	C4
Mass (without HJ ring)	100.18 oz
Brand	NTN



Product performance	
Dynamic load, C	760 kN
Static load, C0	920 kN
Fatigue limit load, Cu	86.80 kN
Nlim (oil)	2,300 RPM
Nlim (grease)	1,900 RPM
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	248 °C
Characteristic cage frequency, FTF	0.41 Hz
Characteristic rolling element frequency, BSF	5.10 Hz
Characteristic outer ring frequency, BPF0	5.68 Hz
Characteristic inner ring frequency, BPF1	8.32 Hz

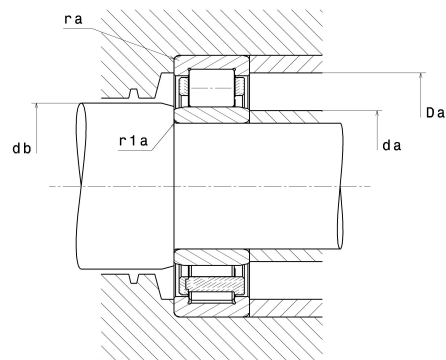

Abutment dimensions	
da min	6.5354 "
da max	7.4803 "
db min	7.6772 "
Da max	11.9685 "
ra max	0.1181 "
r1a max	0.1181 "

Calculation factors

Equivalent dynamic radial load

$$P = Fr$$

Equivalent static radial load

$$P_0 = Fr$$