



PDF technical sheet NUP208ET2XNRC3U




Single row cylindrical roller bearings

Single row cylindrical roller bearing with snap ring, separable, locating, polyamide cage

Product definition	
d	1.5748 "
D	3.1496 "
B	0.7087 "
E	2.8150 "
F	1.9488 "
d1	2.1220 "
a min	0.1209 "
a max	0.1291 "
Ca min	0.1839 "
Ca max	0.1961 "
rNs min	0.0197 "
D3 max	3.0240 "
b min	0.0748 "
b max	0.0866 "
r0 max	0.0236 "
D4 max	3.4094 "
f	0.0669 "
Snap ring reference	R80
rs min	0.0433 "
r1s min	0.0433 "
Radial clearance class	C3
Mass (without HJ ring)	1.40 oz
Brand	NTN

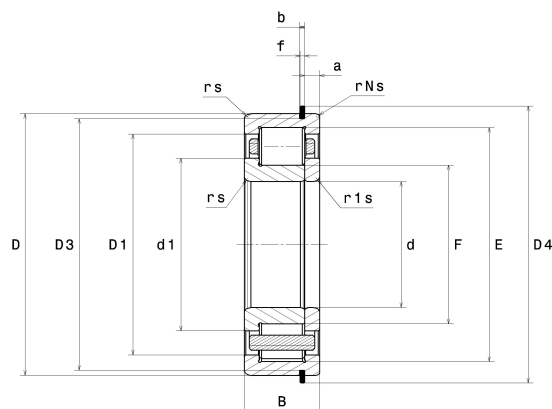

Product performance	
Dynamic load, C	55.50 kN
Static load, C0	55.50 kN
Fatigue limit load, Cu	6.80 kN
Nlim (oil)	10,000 RPM
Nlim (grease)	8,500 RPM
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	248 °C
Characteristic cage frequency, FTF	0.41 Hz
Characteristic rolling element frequency, BSF	5.32 Hz
Characteristic outer ring frequency, BPF0	5.73 Hz
Characteristic inner ring frequency, BPF1	8.27 Hz

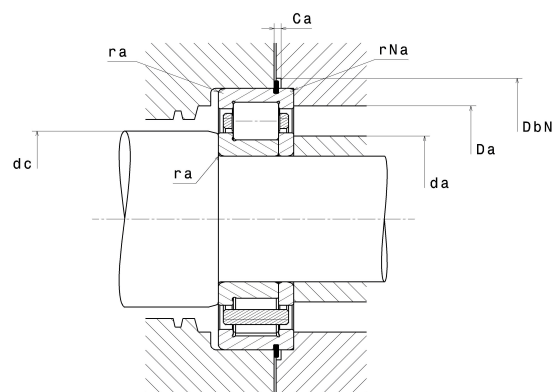

Abutment dimensions

da min	1.8307 "
dc min	2.2047 "
Da max	2.8937 "
DbN min	3.4646 "
ra max	0.0394 "
rNa max	0.0197 "

Calculation factors

Equivalent dynamic radial load

$$P = Fr$$

Equivalent static radial load

$$P_0 = Fr$$