


PDF technical sheet N340EMJ30




Single row cylindrical roller bearings

Single row cylindrical roller bearing, floating, separable, brass cage

Product definition	
d	7.8740 "
D	16.5354 "
B	3.1496 "
E	14.5669 "
F	10.1575 "
d1	10.9843 "
rs min	0.1969 "
r1s min	0.1969 "
Radial clearance class	C3
Mass (without HJ ring)	201.06 oz
Brand	SNR



Product performance	
Dynamic load, C	1,220 kN
Static load, C0	1,590 kN
Fatigue limit load, Cu	138 kN
Nref	1,200 RPM
Nlim	2,400 RPM
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	248 °C
Characteristic cage frequency, FTF	0.41 Hz
Characteristic rolling element frequency, BSF	5.43 Hz
Characteristic outer ring frequency, BPF0	6.16 Hz
Characteristic inner ring frequency, BPF1	8.84 Hz

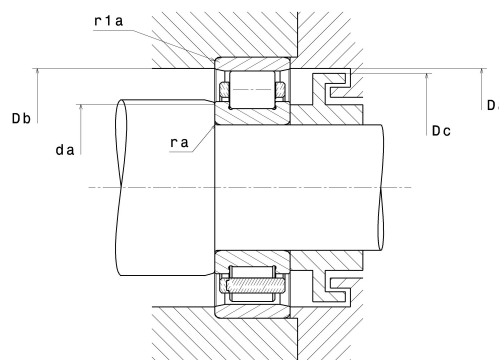

Abutment dimensions	
da min	8.6614 "
Da max	15.7480 "
Db min	14.7244 "
Dc max	14.3701 "
ra max	0.1575 "
r1a max	0.1575 "

Calculation factors

Equivalent dynamic radial load

$$P = Fr$$

Equivalent static radial load

$$P_0 = Fr$$