



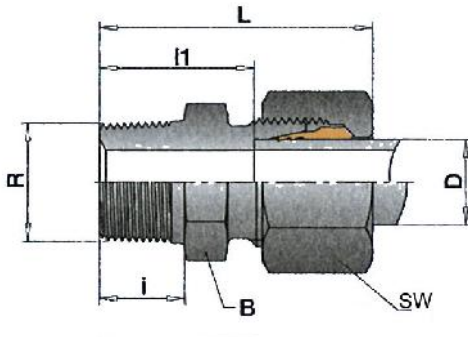

ES 35

Gerade Einschraubverschraubung, Gewinde nach ISO 7-1


Artikel-Nr.	PN	D	R	i	SW	B	L	l ₁
ES 21	100	4,0	R 1/8	8,0	10	10,0	25,5	16,0
ES 23	100	6,0	R 1/8	8,0	12	11,0	26,0	14,5
ES 24	100	8,0	R 1/8	8,0	14	12,0	28,0	16,5
ES 25	315	6,0	R 1/8	8,0	14	12,0	30,5	16,0
ES 26	315	8,0	R 1/8	8,0	17	14,0	34,2	16,0
ES 28	315	6,0	R 1/4	12,0	14	14,0	34,5	20,0
ES 29	315	8,0	R 1/4	12,0	17	14,0	35,0	20,0
ES 30	315	10,0	R 1/4	12,0	19	17,0	36,0	21,0
ES 31	315	12,0	R 1/4	12,0	22	19,0	40,6	22,0
ES 33	315	6,0	R 3/8	12,0	14	17,0	38,5	21,0
ES 34	315	8,0	R 3/8	12,0	17	17,0	39,2	21,0
ES 35	315	10,0	R 3/8	12,0	19	17,0	36,0	21,0
ES 36	315	12,0	R 3/8	12,0	22	19,0	37,0	22,0
ES 37	315	15,0	R 3/8	12,0	27	24,0	42,3	23,0
ES 38	315	8,0	R 1/2	14,0	17	22,0	42,2	24,0
ES 39	315	10,0	R 1/2	14,0	19	22,0	42,8	24,0
ES 40	315	12,0	R 1/2	14,0	22	22,0	39,0	24,0
ES 41	315	15,0	R 1/2	14,0	27	24,0	40,0	25,0
ES 42	315	18,0	R 1/2	14,0	32	27,0	42,0	25,5
ES 43	160	18,0	R 3/4	16,0	32	32,0	49,2	28,5
ES 44	160	22,0	R 3/4	16,0	36	32,0	46,0	29,5

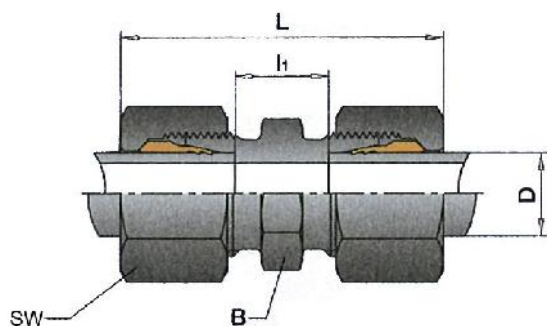

ES 55

Gerade Verschraubung

Artikel-Nr.	PN	D	SW	B	L	l ₁
ES 50	100	4,0	10	9,0	31,0	12,0
ES 52	100	6,0	12	11,0	32,0	9,0
ES 53	100	8,0	14	12,0	35,0	12,0
ES 54	315	6,0	14	12,0	39,0	10,
ES 55	315	8,0	17	14,0	40,0	11,0
ES 56	315	10,0	19	17,0	42,0	13,0
ES 57	315	12,0	22	19,0	43,0	14,0
ES 58	315	15,0	27	24,0	46,0	16,0
ES 59	315	18,0	32	27,0	48,0	16,0
ES 60	160	22,0	36	32,0	52,0	20,0

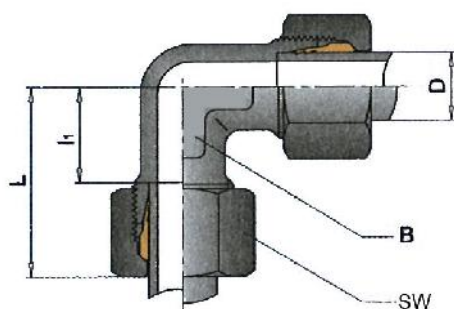

ES 75

Winkel-Verschraubung

Artikel-Nr.	PN	D	SW	B	L	l ₁
ES 70	100	4,0	10	9,0	21,0	11,0
ES 72	100	6,0	12	9,0	21,0	9,5
ES 73	100	8,0	14	12,0	23,0	11,5
ES 74	315	6,0	14	12,0	27,0	12,0
ES 75	315	8,0	17	12,0	29,0	14,0
ES 76	315	10,0	19	14,0	30,0	15,0
ES 77	315	12,0	22	17,0	32,0	17,0
ES 78	315	15,0	27	19,0	36,0	21,0
ES 79	315	18,0	32	24,0	40,0	23,5