

PDF technical sheet 7000UADG/GLP42




High precision angular contact ball bearings

High precision angular contact ball bearing, moulded polyamide cage centred on balls


Product definition

d	0.3937 "
D	1.0236 "
B	0.3150 "
d1	0.5984 "
d2	0.5512 "
D1	0.8031 "
D2	0.9016 "
a	0.3228 "
Contact angle, α	25 °
rs min	0.0118 "
r1s min	0.0059 "
f0	13
Precision class	P42
Mass	0.07 oz
Brand	NTN

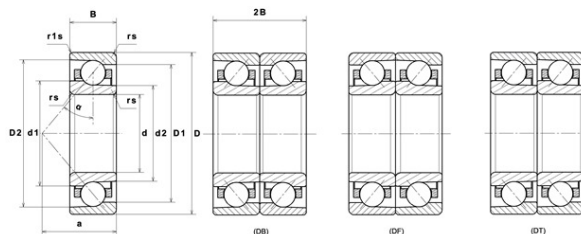

Product performance

Dynamic load, C	5.15 kN
Static load, C0	2.40 kN
Nlim (oil)	92,100 RPM
Nlim (grease)	57,000 RPM
Preload level	GL
Peload value	20 kN
axial rigidity	32.2 N/ μ m
radial rigidity	70 N/ μ m
Min operating temperature, Tmin	-4 °C
Max operating temperature, Tmax	248 °C
Characteristic cage frequency, FTF	0.38 Hz
Characteristic rolling element frequency, BSF	3.52 Hz
Characteristic outer ring frequency, BPF0	3.41 Hz
Characteristic inner ring frequency, BPF1	5.59 Hz

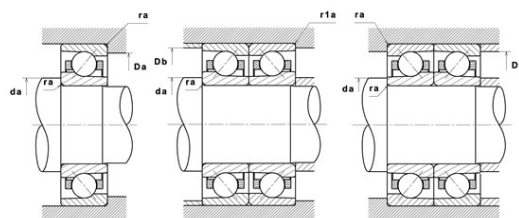

Abutment dimensions

da min	0.4921 "
Da max	0.9252 "
Db max	0.9764 "
r1a max	0.0059 "
ra max	0.0118 "
D6	0.6063 "

Calculation factors

Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

Series			e	Single or DT bearing arrangement				DB or DF arrangement			
				Fa / Fr ≤ e		Fa / Fr > e		Fa / Fr ≤ e		Fa / Fr > e	
				X	Y	X	Y	X	Y	X	Y
70 (NTN & SNR) 72 (NTN & SNR) 78 (NTN) 79 (NTN) 719 (SNR)	15°	0.178	0.38	1	0	0.44	1.47	1	1.65	0.72	2.39
		0.357	0.4				1.4		1.57		2.28
		0.714	0.43				1.3		1.46		2.11
		1.07	0.46				1.23		1.38		2
		1.43	0.47				1.19		1.34		1.93
		2.14	0.5				1.12		1.26		1.82
		3.57	0.55				1.02		1.14		1.66
		5.35	0.56						1.12		1.63
		7.14	0.56				1		1.12		1.63
	25°		0.68			0.41	0.87		0.92	0.67	1.41
	30°		0.8				0.76		0.78		1.24

Equivalent static radial load

$$P_o = X_o.F_r + Y_o.F_a$$

Series			Single or DT bearing arrangement		DB or DF arrangement	
			X ₀	Y ₀	X ₀	Y ₀
70 (NTN & SNR) 72 (NTN & SNR) 78 (NTN) 79 (NTN) 719 (SNR)	15°		0.5	0.46	1	0.92
	25°			0.38		0.76
	30°			0.33		0.66

For single or DT bearing arrangement :

If $P_o < F_r$, then use $P_o = F_r$