

PDF technical sheet


7912UCG/GNP42U3G




High precision angular contact ball bearings

High precision angular contact ball bearing, moulded polyamide cage centred on balls

Product definition	
d	2.3622 "
D	3.3465 "
B	0.5118 "
d1	2.7047 "
d2	2.6299 "
D1	3.0079 "
D2	3.1535 "
a	0.6417 "
Contact angle, α	15 °
rs min	0.0394 "
r1s min	0.0236 "
f0	16.5
Precision class	P42
Mass	0.67 oz
Brand	NTN

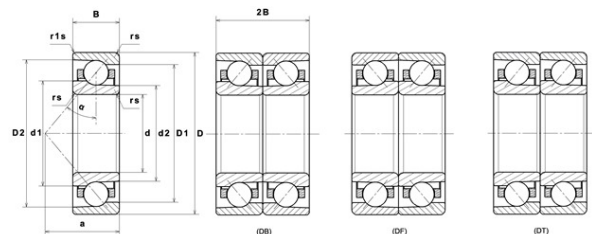

Product performance	
Dynamic load, C	20.50 kN
Static load, C0	20.30 kN
Nlim (oil)	25,900 RPM
Nlim (grease)	16,200 RPM
Preload level	GN
Peload value	127 kN
axial rigidity	71.1 N/ μ m
radial rigidity	400 N/ μ m
Min operating temperature, Tmin	-4 °C
Max operating temperature, Tmax	248 °C
Characteristic cage frequency, FTF	0.45 Hz
Characteristic rolling element frequency, BSF	10.06 Hz
Characteristic outer ring frequency, BPF0	11.31 Hz
Characteristic inner ring frequency, BPF1	13.69 Hz

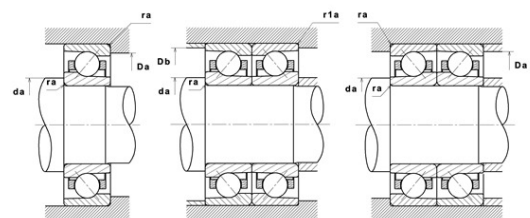

Abutment dimensions

da min	2.5787 "
Da max	3.1299 "
Db max	3.1693 "
r1a max	0.0236 "
ra max	0.0394 "
D6	2.7205 "

Calculation factors

Equivalent dynamic radial load

$$P = X \cdot Fr + Y \cdot Fa$$

Series			e	Single or DT bearing arrangement				DB or DF arrangement			
				Fa / Fr ≤ e		Fa / Fr > e		Fa / Fr ≤ e		Fa / Fr > e	
				X	Y	X	Y	X	Y	X	Y
70 (NTN & SNR) 72 (NTN & SNR) 78 (NTN) 79 (NTN) 719 (SNR)	15°	0.178	0.38	1	0	0.44	1.47	1	1.65	0.72	2.39
		0.357	0.4				1.4		1.57		2.28
		0.714	0.43				1.3		1.46		2.11
		1.07	0.46				1.23		1.38		2
		1.43	0.47				1.19		1.34		1.93
		2.14	0.5				1.12		1.26		1.82
		3.57	0.55				1.02		1.14		1.66
		5.35	0.56						1.12		1.63
		7.14	0.56				1		1.12		1.63
	25°		0.68			0.41	0.87		0.92	0.67	1.41
	30°		0.8				0.76		0.78		1.24

Equivalent static radial load

$$Po = Xo \cdot Fr + Yo \cdot Fa$$

Series			Single or DT bearing arrangement		DB or DF arrangement	
			Xo	Yo	Xo	Yo
70 (NTN & SNR) 72 (NTN & SNR) 78 (NTN) 79 (NTN) 719 (SNR)	15°		0.5	0.46	1	0.92
	25°			0.38		0.76
	30°			0.33		0.66

For single or DT bearing arrangement :

If $Po < Fr$, then use $Po = Fr$