

PDF technical sheet 16020C3



Single row deep groove ball bearings

Deep groove ball bearing, radial contact, pressed steel cage, open


Product definition

d	3.9370 "
D	5.9055 "
B	0.6299 "
rs min	0.0394 "
Radial clearance class	C3
Mass	3.21 oz
Brand	NTN



Product performance

Dynamic load, C	35 kN
Static load, C0	36.50 kN
Fatigue limit load, Cu	1.48 kN
f0	16.4
Nlim (oil)	5,000 RPM
Nlim (grease)	4,200 RPM
Min operating temperature, Tmin	-76 °C
Characteristic cage frequency, FTF	0.46 Hz
Characteristic rolling element frequency, BSF	12.03 Hz
Characteristic outer ring frequency, BPF0	9.63 Hz
Characteristic inner ring frequency, BPF1	11.37 Hz

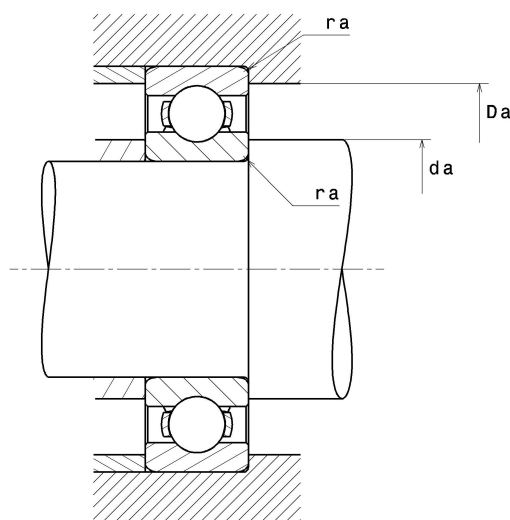

Abutment dimensions

da min	4.1339 "
Da max	5.7087 "
ra max	0.0394 "

Calculation factors

Equivalent dynamic radial load

$$P = X \cdot Fr + Y \cdot Fa$$

$\frac{f_0 F_a}{C_0}$	e	$F_a / Fr \leq e$		$F_a / Fr > e$	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

$$P_0 = X_0 \cdot Fr + Y_0 \cdot Fa$$

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement :

If $P_0 < Fr$, then use $P_0 = Fr$