

PDF technical sheet 16032C3



Single row deep groove ball bearings

Deep groove ball bearing, radial contact, pressed steel cage, open


Product definition

d	6.2992 "
D	9.4488 "
B	0.9843 "
rs min	0.0591 "
Radial clearance class	C3
Mass	12.84 oz
Brand	NTN



Product performance

Dynamic load, C	99 kN
Static load, C0	108 kN
Fatigue limit load, Cu	3.45 kN
f0	16.5
Nlim (oil)	3,000 RPM
Nlim (grease)	2,600 RPM
Min operating temperature, Tmin	-76 °C
Characteristic cage frequency, FTF	0.45 Hz
Characteristic rolling element frequency, BSF	10.40 Hz
Characteristic outer ring frequency, BPF0	8.14 Hz
Characteristic inner ring frequency, BPF1	9.86 Hz

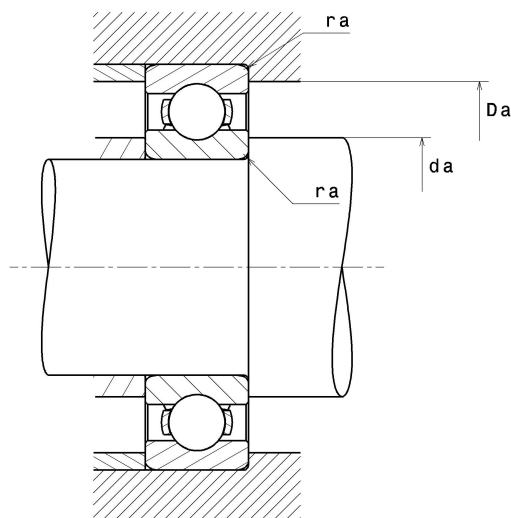

Abutment dimensions

da min	6.6142 "
Da max	9.1339 "
ra max	0.0591 "

Calculation factors

Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

$\frac{f_0 F_a}{C_0}$	e	$F_a / F_r \leq e$		$F_a / F_r > e$	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

$$P_0 = X_0.F_r + Y_0.F_a$$

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement :

If $P_0 < F_r$, then use $P_0 = F_r$