


PDF technical sheet 6219ZC3




Single row deep groove ball bearings

Deep groove ball bearing, radial contact, pressed steel cage, shield on one side


Product definition

d	3.7402 "
D	6.6929 "
B	1.2598 "
rs min	0.0827 "
Radial clearance class	C3
Mass	9.24 oz
Brand	NTN

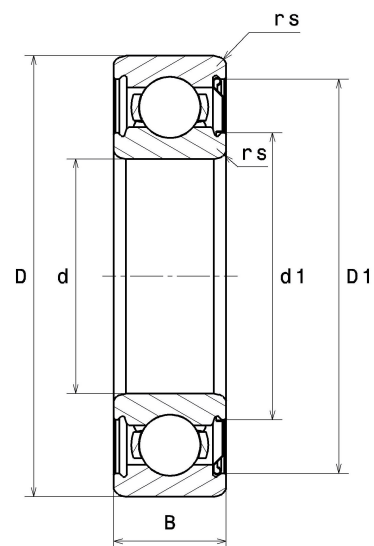

Product performance

Dynamic load, C	109 kN
Static load, C0	82 kN
Fatigue limit load, Cu	3.25 kN
f0	14.4
Nlim (oil)	4,400 RPM
Nlim (grease)	3,700 RPM
Min operating temperature, Tmin	-76 °C
Characteristic cage frequency, FTF	0.41 Hz
Characteristic rolling element frequency, BSF	5.38 Hz
Characteristic outer ring frequency, BPF0	4.10 Hz
Characteristic inner ring frequency, BPF1	5.90 Hz

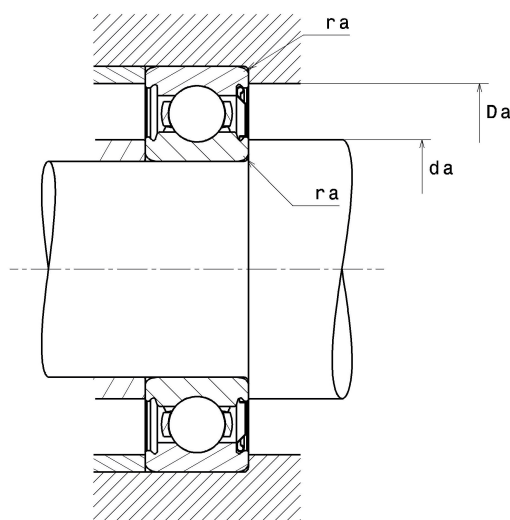

Abutment dimensions

da min	4.1732 "
Da max	6.2598 "
ra max	0.0787 "

Calculation factors

Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

$\frac{f_0 F_a}{C_0}$	e	$F_a / F_r \leq e$		$F_a / F_r > e$	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

$$P_0 = X_0.F_r + Y_0.F_a$$

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement :

If $P_0 < F_r$, then use $P_0 = F_r$