

PDF technical sheet 6820C3




Single row deep groove ball bearings

Deep groove ball bearing, radial contact, pressed steel cage, open


Product definition

d	3.9370 "
D	4.9213 "
B	0.5118 "
rs min	0.0394 "
Radial clearance class	C3
Mass	1.10 oz
Brand	NTN

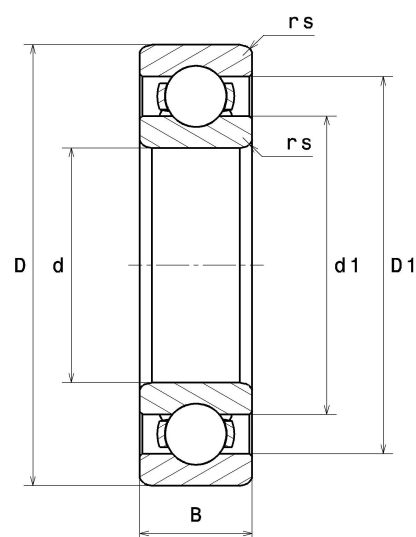

Product performance

Dynamic load, C	19.60 kN
Static load, C0	21.20 kN
Fatigue limit load, Cu	0.91 kN
f0	16
Nlim (oil)	5,600 RPM
Nlim (grease)	4,800 RPM
Min operating temperature, Tmin	-76 °C
Characteristic cage frequency, FTF	0.47 Hz
Characteristic rolling element frequency, BSF	15.68 Hz
Characteristic outer ring frequency, BPF0	12.18 Hz
Characteristic inner ring frequency, BPF1	13.83 Hz

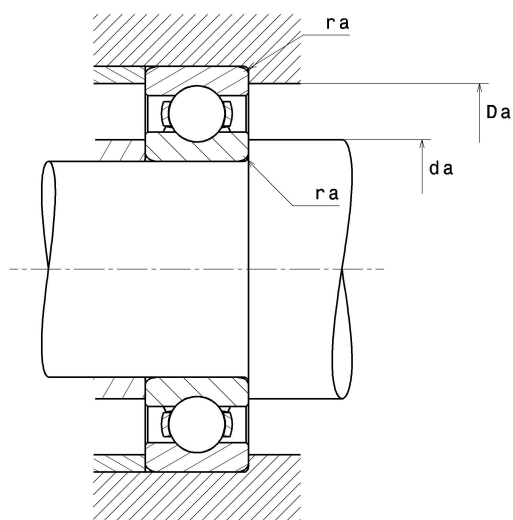

Abutment dimensions

da min	4.1339 "
Da max	4.7244 "
ra max	0.0394 "

Calculation factors

Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

$\frac{f_0 F_a}{C_0}$	e	$F_a / F_r \leq e$		$F_a / F_r > e$	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

$$P_0 = X_0.F_r + Y_0.F_a$$

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement :

If $P_0 < F_r$, then use $P_0 = F_r$