

PDF technical sheet 16019C3



Single row deep groove ball bearings

Deep groove ball bearing, radial contact, pressed steel cage, open


Product definition

d	3.7402 "
D	5.7087 "
B	0.6299 "
rs min	0.0394 "
Radial clearance class	C3
Mass	3.12 oz
Brand	NTN



Product performance

Dynamic load, C	34.50 kN
Static load, C0	35 kN
Fatigue limit load, Cu	1.45 kN
f0	16.5
Nlim (oil)	5,300 RPM
Nlim (grease)	4,500 RPM
Min operating temperature, Tmin	-76 °C
Characteristic cage frequency, FTF	0.46 Hz
Characteristic rolling element frequency, BSF	11.54 Hz
Characteristic outer ring frequency, BPF0	9.14 Hz
Characteristic inner ring frequency, BPF1	10.86 Hz

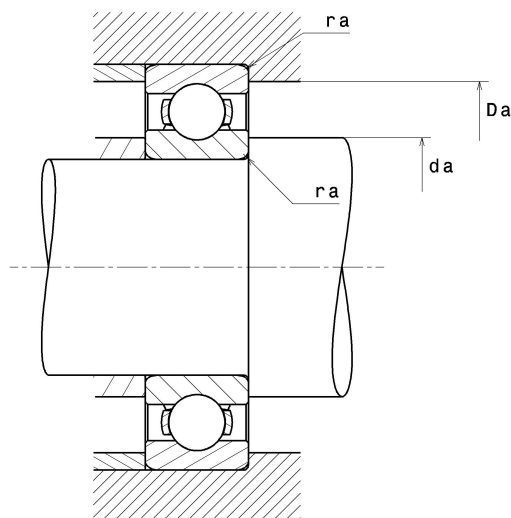

Abutment dimensions

da min	3.9370 "
Da max	5.5118 "
ra max	0.0394 "

Calculation factors

Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

$\frac{f_0 F_a}{C_0}$	e	$F_a / F_r \leq e$		$F_a / F_r > e$	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

$$P_0 = X_0.F_r + Y_0.F_a$$

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement:

If $P_0 < F_r$, then use $P_0 = F_r$