


PDF technical sheet 6202ZZNC3/L453




Single row deep groove ball bearings

Deep groove ball bearing, radial contact, pressed steel cage, snap ring groove on outer diameter, shields on both sides


Product definition

d	0.5906 "
D	1.3780 "
B	0.4331 "
a min	0.0748 "
a max	0.0811 "
rs min	0.0236 "
rNs min	0.0197 "
D3 max	1.3059 "
b min	0.0531 "
b max	0.0650 "
r0 max	0.0157 "
Radial clearance class	C3
Mass	0.16 oz
Brand	NTN

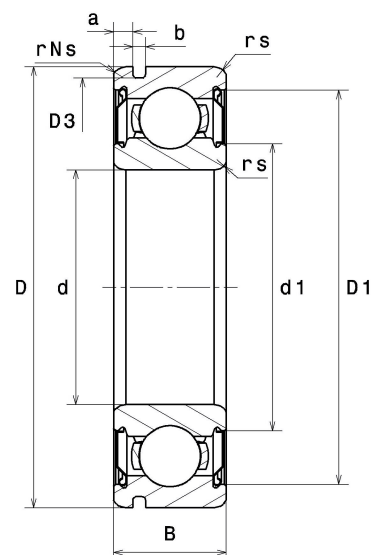

Product performance

Dynamic load, C	7.75 kN
Static load, C0	3.60 kN
Fatigue limit load, Cu	0.16 kN
f0	12.7
Nlim (grease)	19,000 RPM
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	356 °C
Characteristic cage frequency, FTF	0.37 Hz
Characteristic rolling element frequency, BSF	3.68 Hz
Characteristic outer ring frequency, BPF0	2.61 Hz
Characteristic inner ring frequency, BPF1	4.39 Hz

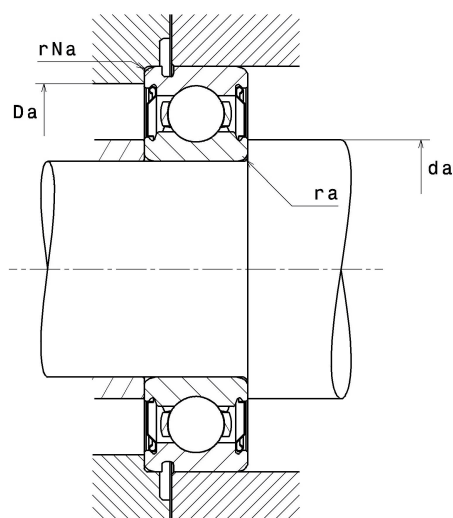

Abutment dimensions

da min	0.7480 "
Da max	1.2205 "
ra max	0.0236 "
rNa max	0.0197 "

Calculation factors

Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

$\frac{f_0 F_a}{C_0}$	e	$F_a / F_r \leq e$		$F_a / F_r > e$	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

$$P_0 = X_0.F_r + Y_0.F_a$$

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement:

If $P_0 < F_r$, then use $P_0 = F_r$