


PDF technical sheet 6332MJ30




Single row deep groove ball bearings

Deep groove ball bearing, radial contact, machined cage, open

Product definition	
d	6.2992 "
D	13.3858 "
B	2.6772 "
d1	8.6496 "
D1	11.0591 "
rs min	0.1575 "
Radial clearance class	C3
Mass	112.07 oz
Brand	SNR

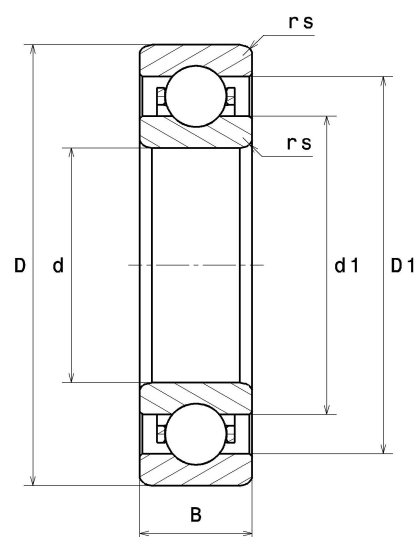

Product performance	
Dynamic load, C	297 kN
Static load, C0	322 kN
Fatigue limit load, Cu	9.30 kN
f0	13.9
Nref	2,800 RPM
Nlim	4,100 RPM
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	248 °C
Characteristic cage frequency, FTF	0.40 Hz
Characteristic rolling element frequency, BSF	4.72 Hz
Characteristic outer ring frequency, BPF0	3.59 Hz
Characteristic inner ring frequency, BPF1	5.41 Hz

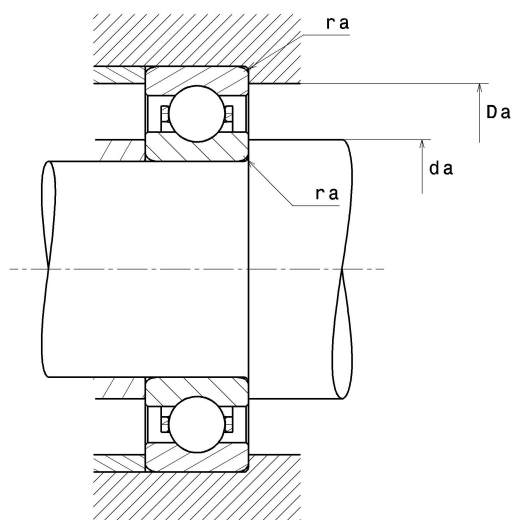

Abutment dimensions

da min	6.9291 "
Da max	12.7559 "
ra max	0.1181 "

Calculation factors

Equivalent dynamic radial load

$$P = X \cdot Fr + Y \cdot Fa$$

$\frac{f_0 F_a}{C_0}$	e	$F_a / Fr \leq e$		$F_a / Fr > e$	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

$$P_0 = X_0 \cdot Fr + Y_0 \cdot Fa$$

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement :

If $P_0 < Fr$, then use $P_0 = Fr$