

## PDF technical sheet N214C3




### Single row cylindrical roller bearings

Single row cylindrical roller bearing, floating, separable, pressed steel cage

| Product definition     |          |
|------------------------|----------|
| d                      | 2.7559 " |
| D                      | 4.9213 " |
| B                      | 0.9449 " |
| E                      | 4.3504 " |
| F                      | 3.3268 " |
| d1                     | 3.5276 " |
| rs min                 | 0.0591 " |
| r1s min                | 0.0591 " |
| Radial clearance class | C3       |
| Mass (without HJ ring) | 4.07 oz  |
| Brand                  | NTN      |



| Product performance             |           |
|---------------------------------|-----------|
| Dynamic load, C                 | 83.50 kN  |
| Static load, C0                 | 95 kN     |
| Fatigue limit load, Cu          | 11.60 kN  |
| Nlim (oil)                      | 6,500 RPM |
| Nlim (grease)                   | 5,500 RPM |
| Min operating temperature, Tmin | -40 °C    |
| Max operating temperature, Tmax | 248 °C    |

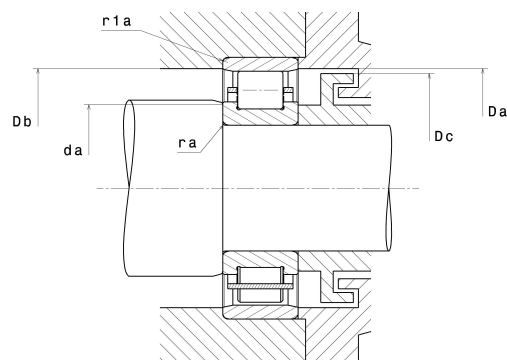

| Abutment dimensions |          |
|---------------------|----------|
| da min              | 3.0709 " |
| Da max              | 4.6063 " |
| Db min              | 4.4488 " |
| Dc max              | 4.2913 " |
| ra max              | 0.0591 " |
| r1a max             | 0.0591 " |

### Calculation factors

Equivalent dynamic radial load

$$P = F_r$$

Equivalent static radial load

$$P_0 = F_r$$

NTN-SNR ROULEMENTS – [www.ntn-snr.com](http://www.ntn-snr.com)

1 rue des Usines – 74010 Annecy Cedex – France – Tel. +33 (0)4 50 65 30 00

S.A. au capital de 123 599 542 € - RCS ANNECY B 325 821 072 - Id. Fiscale : FR 48 325 821 072 - SIRET 325 821 072 00015 -

Code APE 2815 Z - Code NACE 28.15